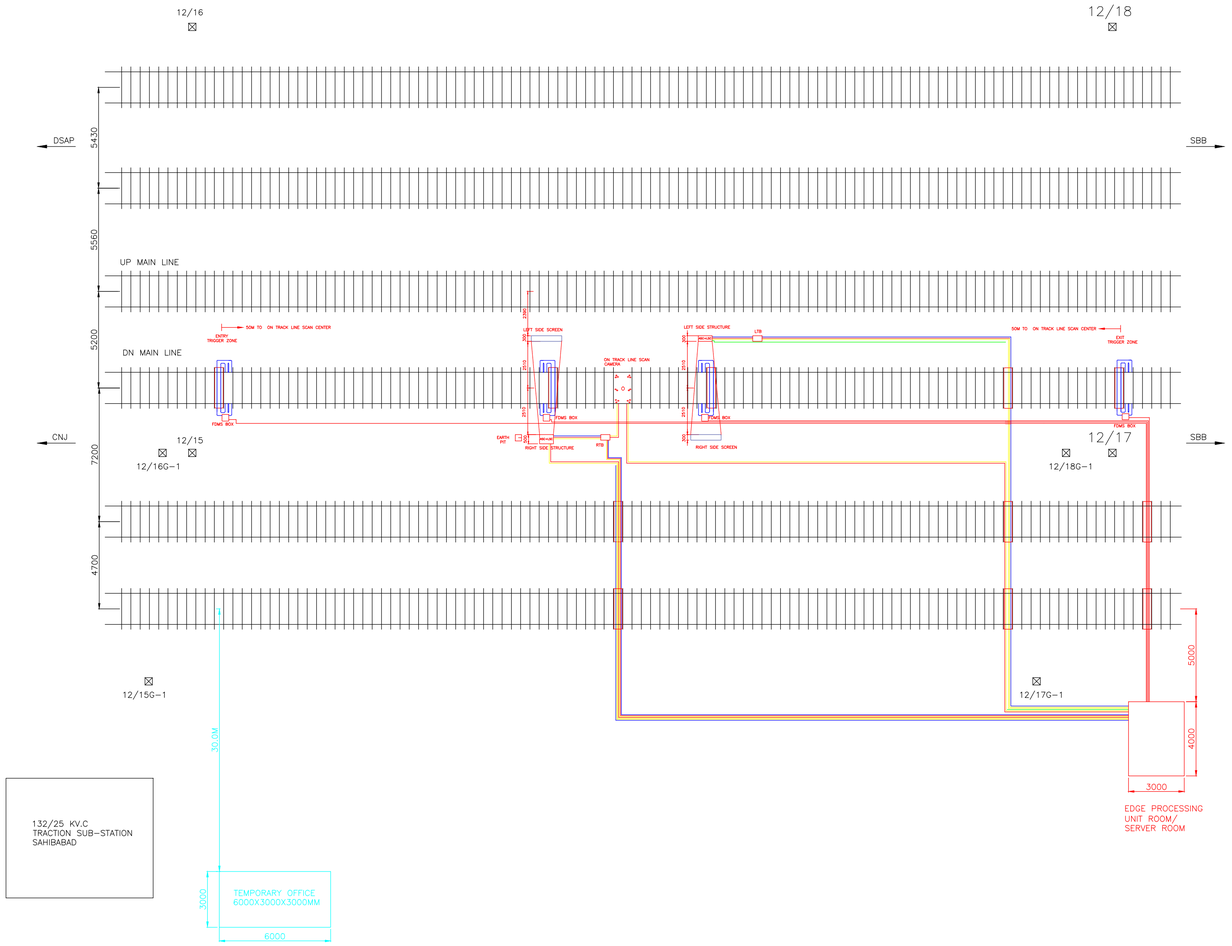


S.NO.	PARAMETER	DETAILS
1.	SITE LOCATION / STN NAME	SAHIBABAD JN.
2.	LINE NAME	DN MAIN LINE
3.	KM NO.	12/15-17
4.	SECTION NAME	DLI-GZB
5.	SECTION SPEED (MAIN)	 KMPH
6.	AVG. TRAINS PER DAY	 (ALL CATEGORIES)
7.	NEXT TXR POINTS TOWARDS DN (CNJ)	NDLS/CHANDRA NAGAR HALT
8.	NEXT TXR POINTS TOWARDS UP (SBB)	SAHIBABAD
9.	POWER SOURCE	
10.	INTERNET CONNECTIVITY SERVICE	OFC (RAILNET ALT. REQUIRED)
11.	IRSOD EDITION	LATEST REVISION (SITE CONFIRMED)
12.	CURVE AT SITE	NONE-STRAIGHT TRACK

S.NO.	ABBREVIATION	DESCRIPTION
1	-	EXISTING STRUCTURES
2	-	NEW STRUCTURES (HOUSES LSC+ASC+ELECTRONICS)
3	-	TEMPORARY STRUCTURE
4	-	NEW POWER CABLES (230V AC) 3C 2.5 SQ MM)
5	-	NEW POWER CABLES (12V DC) CAMERA/SENSOR SUPPLY
6	-	CAT6/6A/7 CABLE(DATA TRANSFER PCS/ACS TO EPU)
7	-	BACKLIFT SCREEN(PAIRED, OPPOSITE SIDE)
8	-	CAMERA TO SCREEN IMAGING SIGHT LINE
9	SERVER ROOM	L X W X H 3000 MM X 4000 MM X 2600 MM
10	RTB & LTB	L X W X H 500 MM X 300 MM X 735 MM
11	FDMS BOX	L X W X H 360 MM X 260 MM X 230 MM
12	LEFT SIDE STRUCTURE RIGHT SIDE STRUCTURE	L X W X H 1500 MM X 300 MM X 1800 MM L X W X H 1500 MM X 500 MM X 1800 MM
13	LEFT & RIGHT SIDE SCREENS	L X W X H 1640 MM X 300 MM X 1800 MM
14	EARTH PIT	L X W X H X D 340 MM X 340 MM X 160 MM X 3000 MM
15	ON TRACK LINE SCAN BOX	L X W X H X D 750MM X 1400MM X 180MM X 250MM
16	EPU	EDGE PROCESSING UNIT-IN EPU CABIN ONLY,NOT IN STRUCTURE
17	FDMS BOX	FIBER DISTRIBUTION MANAGEMENT SYSTEM BOX
18	LTB	LEFT TERMINATION BOX
19	RTB	RIGHT TERMINATION BOX
20	PCS	PRIMARY CAMERA SYSTEM
21	ACS	AUXILIARY CAMERA SYSTEM
22	RFID	RADIO FREQUENCY IDENTIFICATION
23	⊠	OHE MAST
24	□	EARTH PIT
25		ROB (ROAD OVER BRIDGE)

1. STRUCTURE NEAR FACE AT 2510mm FROM TRACK CENTRE. CLEARS IRSOD NEW-WORKS.
2. SCREEN NEAR FACE AT 2510mm FROM TRACK CENTRE. CLEARS IRSOD NEW-WORKS.
3 EACH STATION CROSS-PAIRS A STRUCTURE-MOUNTED LSC WITH THE OPPOSITE-SIDE SCREEN FOR BACKLIT UNDERFRAME/WHEEL IMAGING.
4 ASC (SIDE PROFILE) DOES NOT REQUIRE A PAIRED SCREEN — IT IMAGES THE NEAR SIDE OF THE TRAIN DIRECTLY FROM THE SAME STRUCTURE.
5 ALL EDGE COMPUTE RESIDES IN THE EPU CABIN ONLY. NO PROCESSING HARDWARE IS LOCATED INSIDE THE TRACKSIDE STRUCTURES.
6 SITE CONFIRMED ON LATEST IRSOD REVISION WITH NO CURVES AT THE INSTALLATION POINT — NO CURVE ALLOWANCE ADDED TO CLEARANCES ABOVE.
7 MAIN POWER CABLE FROM OHE/AT SUPPLY FORMAL POWER BUDGET SIGN-OFF REQUIRED FROM TRD/ELECT.
8 S&T CABLES ARE UNDERGROUND. ANY DIGGING WORK TO BE CARRIED OUT ONLY UNDER S&T MONITORING (SSE/Signal/GZB).
9 RAILNET CONNECTIVITY NOT AVAILABLE NEARBY. ALTERNATIVE COMMUNICATION PATH (4G/OFC LEASE) TO BE ARRANGED BY TELE DEPT.
10 AT SUPPLY HAS BEEN PROVIDED AS STANDBY FOR MVIS BASED ON GUIDELINES ISSUED BY RAILWAY BOARD.
11 DRAWING VERSION AA0 — SUBJECT TO FIELD VERIFICATION OF EXACT KM POST AND DEPARTMENTAL SIGN-OFF.

SUPERVISOR'S SIGNATURES:

ADEN/GZB	CDO/GZB	SSE/Works/GZB
SSE/Elect./GZB	SSE/TRD-OHE	SSE/S&T/GZB
SSE/P.WAY/GZB	SSE/TELE/GZB	JE/C&W/GZB

SIGNATURE BLOCK	
DRM/DLI	
ADRM	
ADME	
SR.DEE/TRD	
SR.DOM/C	
SR.DSTE/C	
SR.DEN/C	
SR.DEE/TRD	
SR.DEN/II	

FITT IIT DELHI / PRADIVYA SOFTWARE PVT. LTD. (PSPL)
MVIS – MACHINE VISION-BASED INSPECTION SYSTEM

YHM TECHNICAL	PSPL PRODUCED	JE/C&W/GZB CHECKED	SSE/GZB APPROVED

PROJECT:

NORTHERN RAILWAY (DELHI DIVISION)
DELHI (DLI) TO GHAZIABAD (GZB)
MVIS SITE LAYOUT DRAWING AND CABLE ROUTE PLAN
LOCATION:- DOWN MAIN LINE NEAR OHE POLE 12/15-17
SHEET:- 01 OF 01 SCALE: NTS

INDIAN RAILWAYS
NORTHERN RAILWAY
DELHI DIVISION
REF:
MOU DATED:-

DRG. NO.-